

Engineering Software

P.O. Box 1180, Germantown, MD 20875

Phone: (301) 540-3605

FAX: (301) 540-3605

E-Mail: info@engineering-4e.com

Web Site: <http://www.engineering-4e.com>

Engineering Software is pleased to announce the introduction of *Free Coursework Material*.

Engineering Software Coursework Material covers the following area:



Power Cycles

Carnot Cycle

Brayton Cycle – Power Application

Brayton Cycle – Propulsion Application

Otto Cycle

Diesel Cycle

Carnot Cycle

Introduction

This section provides a Carnot Cycle analysis when the working fluid is air.

Analysis

In the presented Carnot Cycle analysis, only air is considered as the working fluid behaving as a perfect gas -- specific heat has a constant value. Ideal gas state equation is valid -- $pv = RT$.

Air enters a compressor at point 1 and it exits the compressor at point 2. Isentropic compression is considered with no entropy change. Air enters a heat exchanger -- heat addition -- at point 2 and it exits the heat exchanger at point 3. At a constant temperature, heat addition takes place. Air enters a turbine at point 3 and it exits the turbine at point 4. Isentropic expansion is considered with no entropy change. Air enters a heat exchanger -- heat rejection -- at point 4 and it exits the heat exchanger at point 1. At a constant temperature, heat rejection takes place. It should be mentioned that air at point 1 enters the compressor and the cycle is repeated.

Figure 1 presents a Carnot Cycle schematic layout.


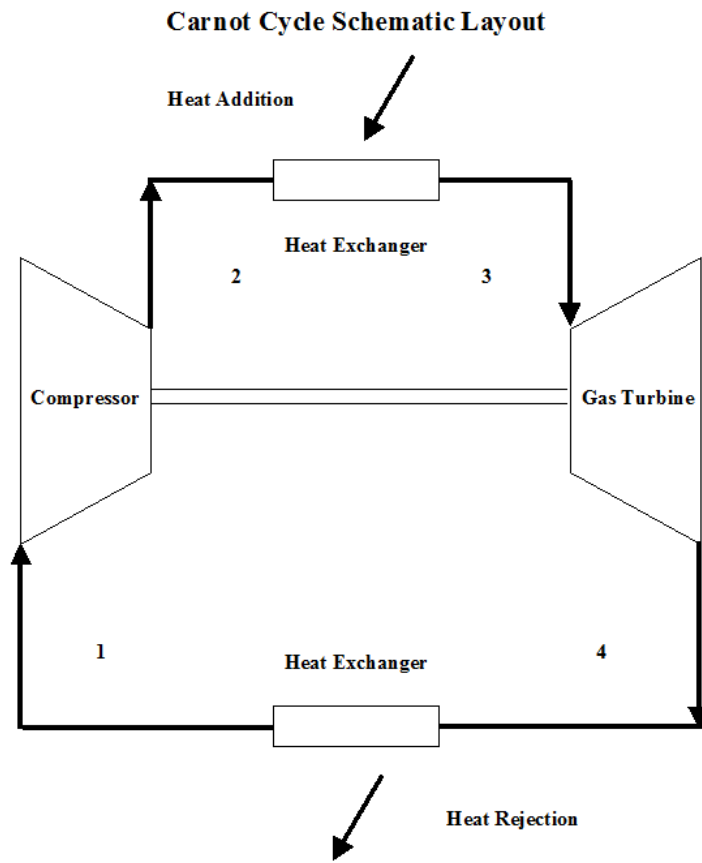


Figure 1 - Carnot Cycle Schematic Layout

Figure 2 presents a Carnot Cycle temperature vs entropy diagram.

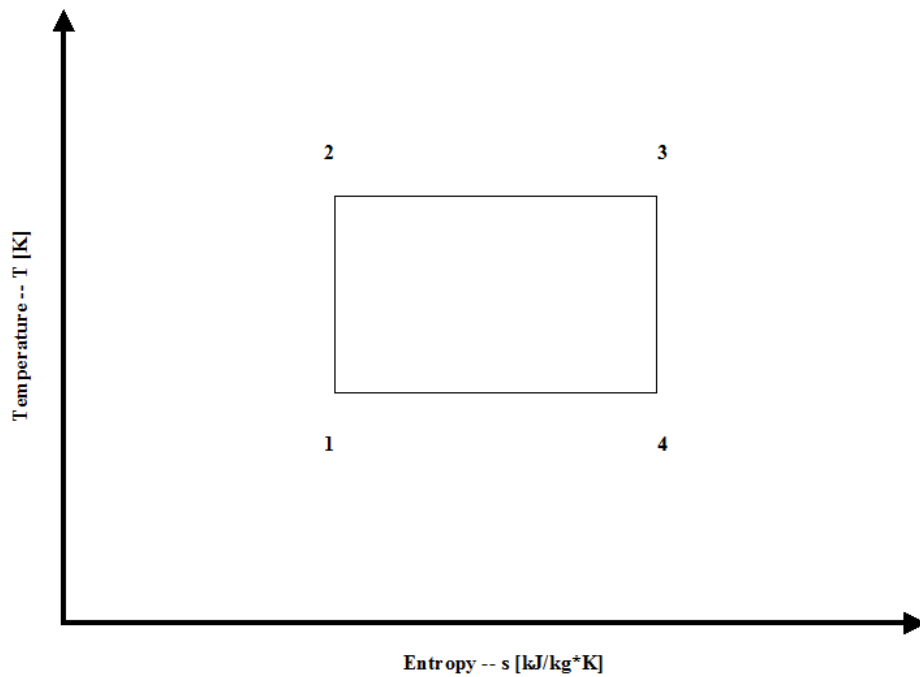

Carnot Cycle T - s Diagram

Figure 2 - Carnot Cycle Temperature vs Entropy Diagram

Figure 3 presents the Carnot Cycle efficiency as a function of the heat addition temperature. It should be noted that the inlet conditions are standard ambient conditions: temperature of 298 [K] and absolute pressure of 1 [atm].

Carnot Cycle Efficiency

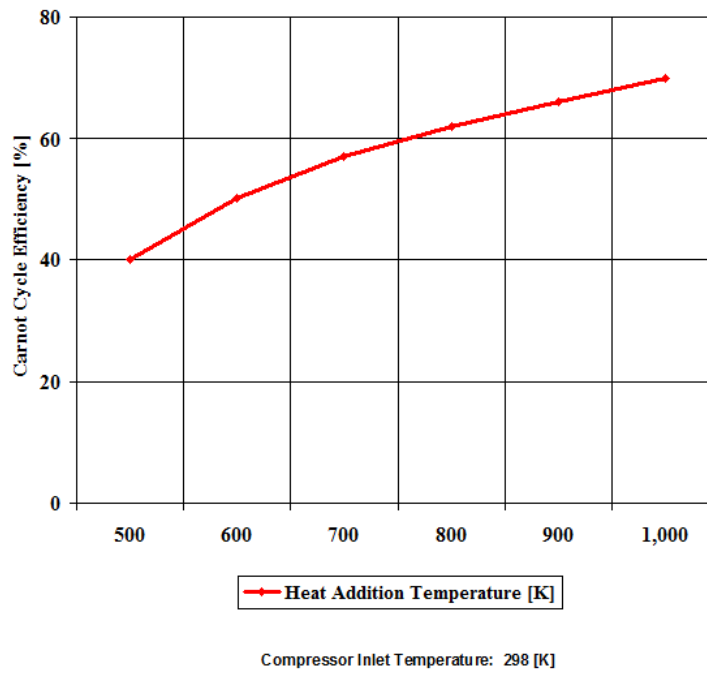


Figure 3 - Carnot Cycle Efficiency vs Heat Addition Temperature

Figure 4 presents the Carnot Cycle efficiency as a function of the heat rejection temperature. It should be noted that the turbine inlet temperature is at 800 [K].

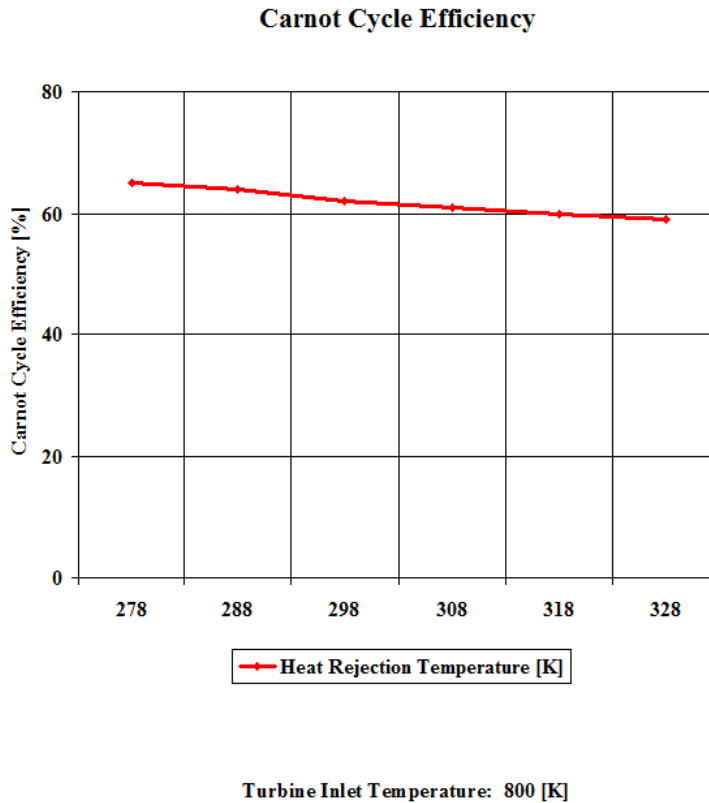


Figure 4 - Carnot Cycle Efficiency vs Heat Rejection Temperature

One can notice that the Carnot Cycle efficiency increases with an increase in the heat addition temperature when the heat rejection temperature does not change at all. One can notice that the Carnot Cycle efficiency decreases with an increase in the heat rejection temperature when the heat addition temperature does not change at all.

Assumptions

Working fluid is air. There is no friction. Compression and expansion are isentropic -- there is no entropy change. During heat addition and heat rejection, the air temperature does not change. Ideal gas state equation is valid -- $pV = RT$. Air behaves as a perfect gas -- specific heat has a constant value.

Governing Equations

$$T_2/T_1 = (p_2/p_1)^{(\gamma-1)/\gamma}$$

$$T_3/T_4 = (p_3/p_4)^{(\kappa-1)/\kappa}$$

$$\kappa = c_p/c_v$$

$$pv = RT$$

$$\eta = 1 - T_1/T_2$$

Input Data

$$T_1 = 298 \text{ [K]}$$

$$p_1 = 1 \text{ [atm]}$$

$$c_p = 1.004 \text{ [kJ/kg}\cdot\text{K]}$$

$$\kappa = c_p/c_v - \text{for air } \kappa = 1.4 \text{ []}$$

Results


Carnot Cycle Efficiency vs Heat Addition Temperature Heat Rejection Temperature is 298 [K]


Heat Addition Temperature [K]	Carnot Cycle Efficiency [%]
500	40.40
600	50.33
700	57.43
800	62.75
900	66.89
1,000	70.22

Carnot Cycle Efficiency vs Heat Rejection Temperature
Heat Addition Temperature is 800 [K]

Heat Rejection Temperature [K]	Carnot Cycle Efficiency [%]
278	65.25
288	64.00
298	62.75
308	61.50
318	60.25
328	59.00


Figures

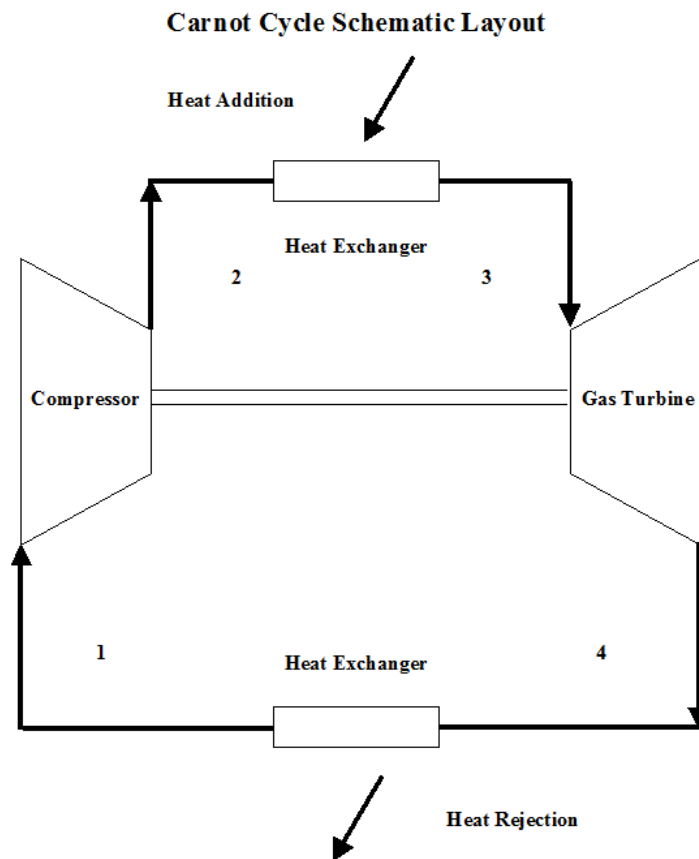

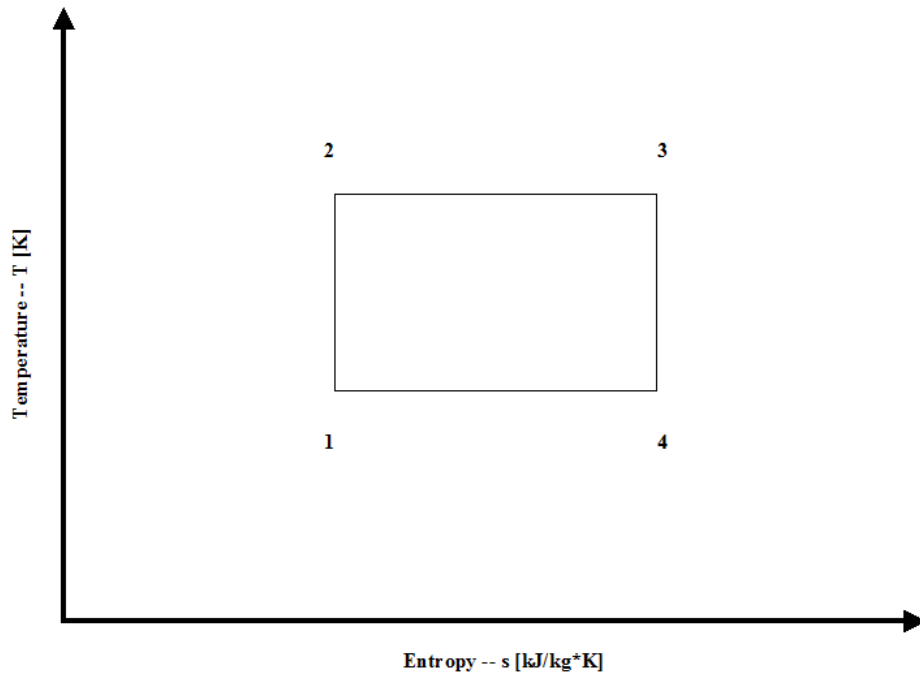


Carnot Cycle T - s Diagram

Carnot Cycle Efficiency

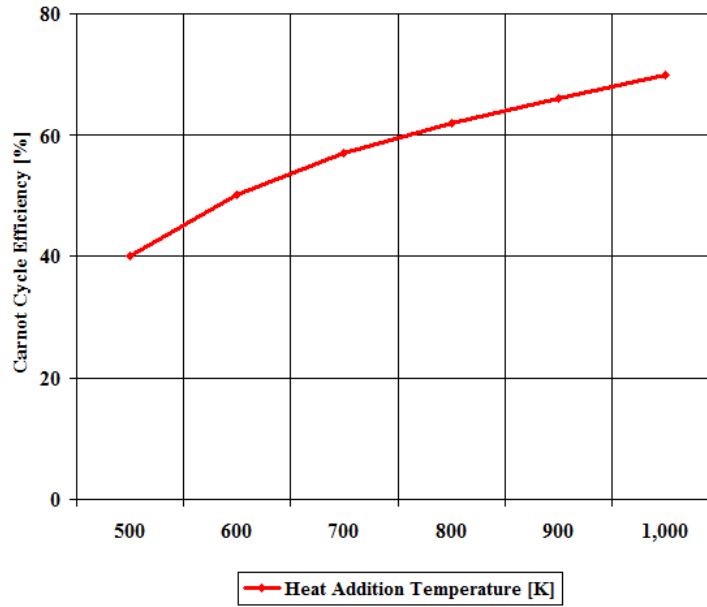

Compressor Inlet Temperature: 298 [K]

Carnot Cycle Efficiency

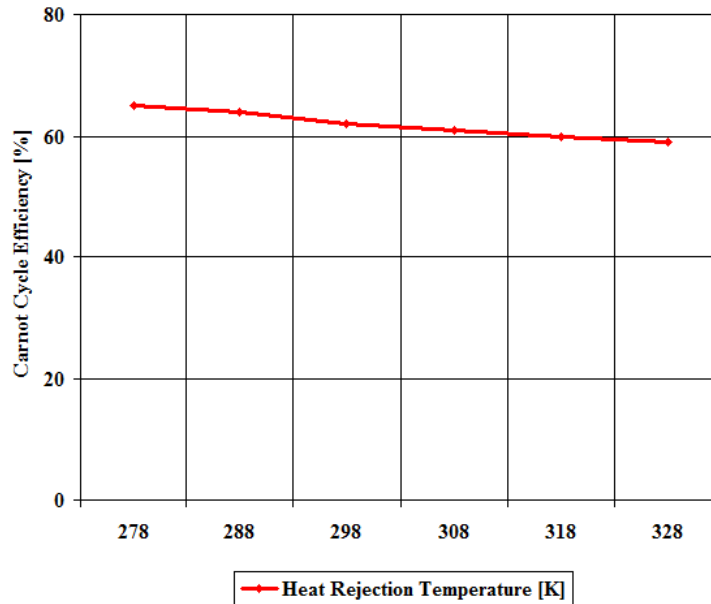

Turbine Inlet Temperature: 800 [K]

Conclusions

The Carnot Cycle efficiency increases with an increase in the heat addition temperature when the heat rejection temperature does not change at all. Furthermore, the Carnot Cycle efficiency decreases with an increase in the heat rejection temperature when the heat addition temperature does not change at all.

The Carnot Cycle efficiency is not dependent on the working fluid properties.

References

JANAF Thermochemical Data - Tables, 1970

Brayton Cycle – Power Application

Introduction

This section provides a Brayton Cycle analysis when the working fluid is air.

Analysis

In the presented Brayton Cycle analysis, only air is considered as the working fluid behaving as a perfect gas -- specific heat has a constant value. Ideal gas state equation is valid -- $pv = RT$.

A gas turbine is a heat engine that uses a high temperature, high pressure gas as the working fluid. Combustion of a fuel in air is usually used to produce the needed temperatures and pressures in the gas turbine, which is why gas turbines are often referred to as combustion turbines. Expansion of the high temperature, high pressure working fluid takes place in the gas turbine. The gas turbine shaft rotation drives an electric generator and a compressor for the working fluid, air, used in the gas turbine combustor. Many gas turbines also use a heat exchanger called a recuperator to impart turbine exhaust heat into the combustor's air/fuel mixture. Gas turbines produce high quality heat that can be used to generate steam for combined heat and power and combined-cycle applications, significantly enhancing efficiency.

The initial state of air is assumed to be at point 1 at the atmospheric conditions, 298 [K] temperature and 1 [atm] pressure. Air is compressed, isentropically, along line 1-2 by a compressor and it enters a combustor. At a constant pressure, combustion takes place (fuel is added to the combustor and the air temperature raises) and/or heat gets added to air. High temperature air exits the combustor at point 3. Then air enters a gas turbine where an isentropic expansion occurs, producing power. Air exits the gas turbine at point 4. It should be mentioned that air at point 1 enters the compressor and the cycle is repeated.

Figure 1 presents a Brayton Cycle schematic layout.


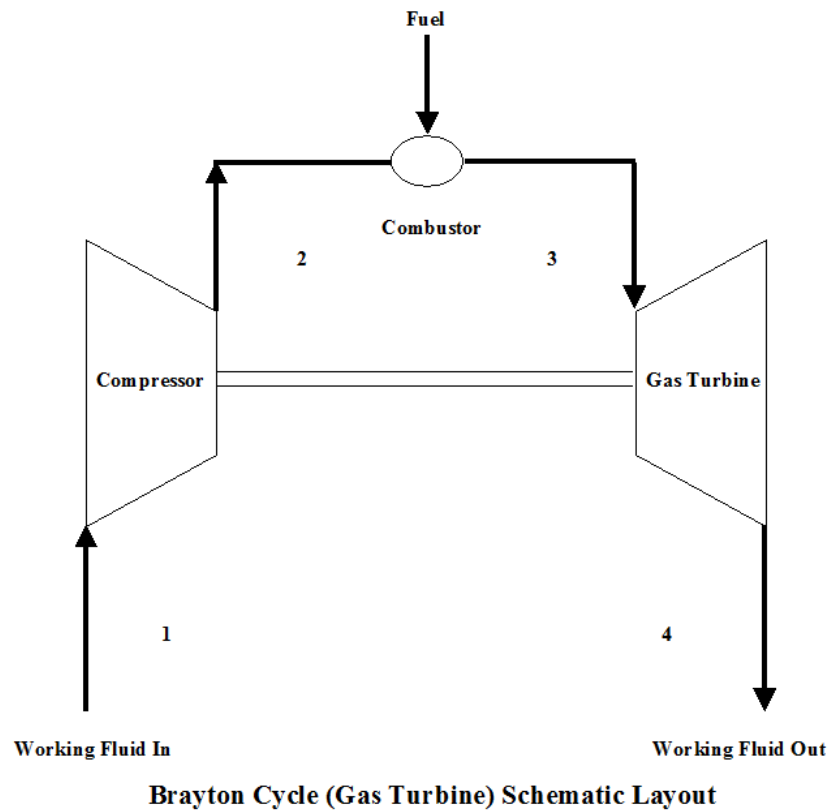


Figure 1 - Brayton Cycle Schematic Layout

Figure 2 presents a Brayton Cycle temperature vs entropy diagram.

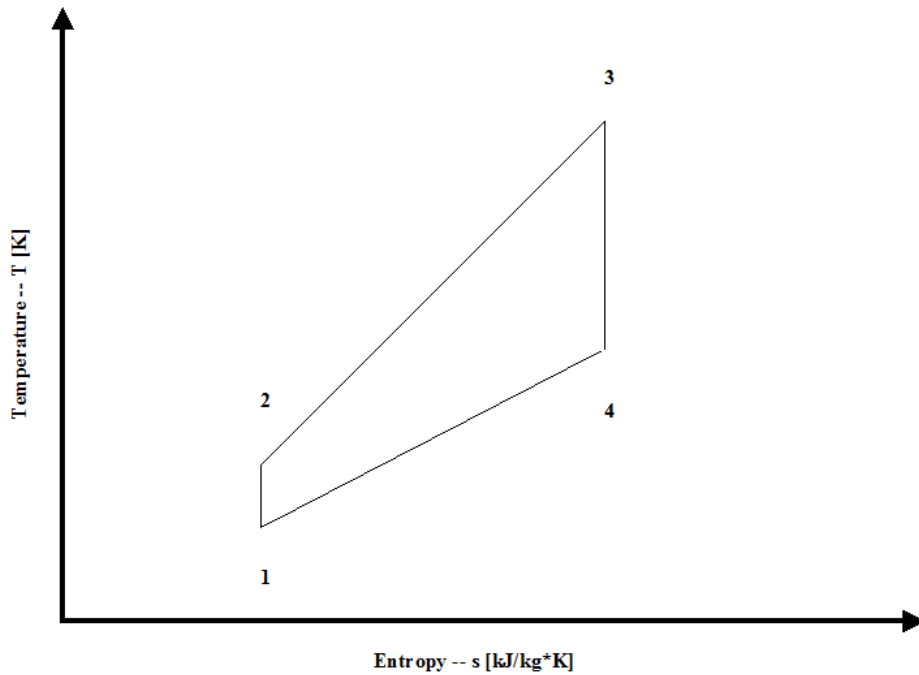

Brayton Cycle (Gas Turbine) T - s Diagram

Figure 2 - Brayton Cycle Temperature vs Entropy Diagram

It should be pointed out that this material deals with the open Brayton Cycle. The way how the T - s diagram is presented, it describes a closed Brayton Cycle -- this would require a heat exchanger after point 4 where the working fluid would be cooled down to point 1 and the cycle repeats. Therefore, the T - s diagram is presented as a closed Brayton Cycle to allow easier understanding and derivation of the Brayton Cycle thermal efficiency -- heat addition and heat rejection.

The gas turbine and compressor are connected by shaft so the considerable amount of work done on the gas turbine is used to power the compressor.

It can be noticed from the T - s diagram that the work done on the gas turbine is greater than the work necessary to power the compressor -- constant pressure lines in the T - s diagram diverge by going to the right side (entropy wise).

Figure 3 presents the Brayton Cycle efficiency as a function of the compression ratio. Figure 3 presents the Brayton Cycle efficiency as a function of the compression ratio. It should be noted that the inlet conditions are standard ambient conditions: temperature of 298 [K] and absolute pressure of 1 [atm].

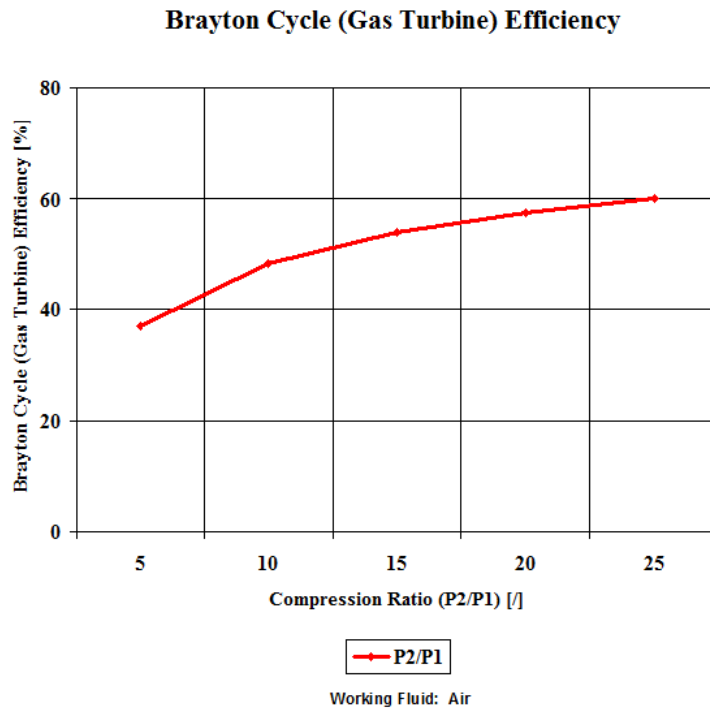


Figure 3 - Brayton Cycle Efficiency

Here, two general performance trends are considered. First, impact of the gas turbine inlet temperature and compression ratio on the Brayton Cycle specific power output and second, impact of the working fluid mass flow rate on the Brayton Cycle power output.

Figure 4 presents the results of the first performance trend, while Figure 5 presents the results of the second trend.

Brayton Cycle (Gas Turbine) Specific Power Output


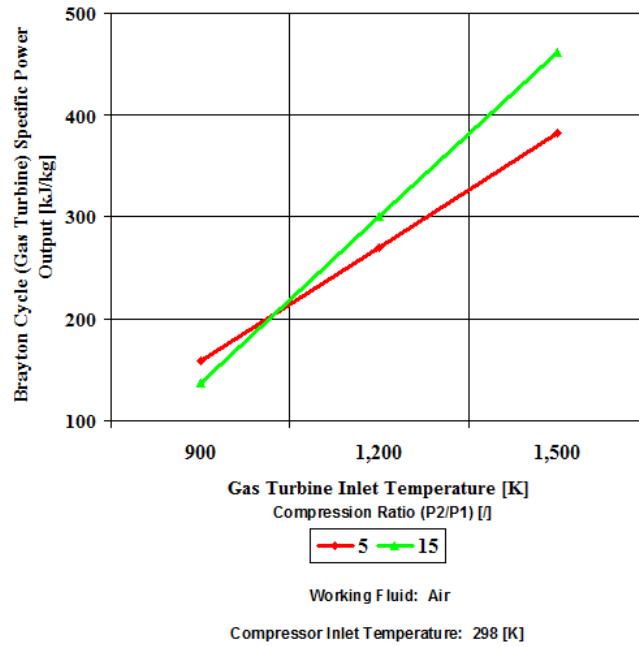


Figure 4 - Brayton Cycle Specific Power Output

Brayton Cycle (Gas Turbine) Power Output

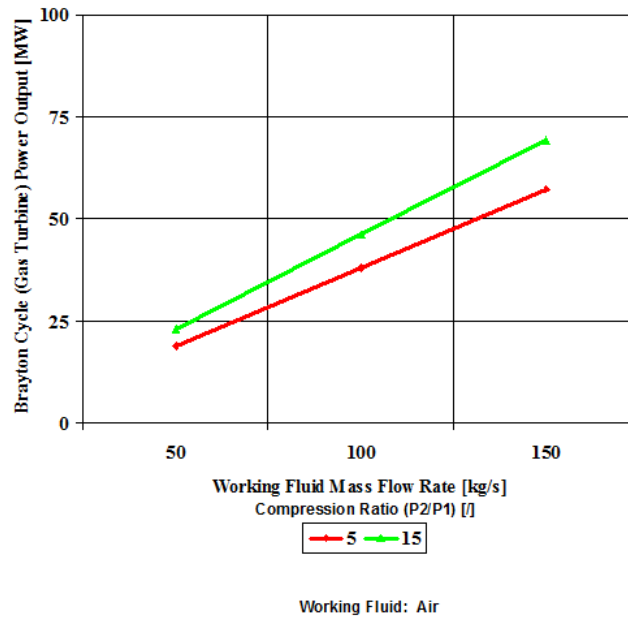

Working Fluid: Air
Compressor Inlet Temperature: 298 [K] -- Gas Turbine Inlet Temperature: 1,500 [K]

Figure 5 - Brayton Cycle Power Output

The Brayton Cycle efficiency increases with an increase in the compression ratio. One can notice that the Brayton Cycle specific power output increases with an increase in the gas turbine inlet temperature. Furthermore, the increase is greater for the higher compression ratio.

One can notice that the Brayton Cycle power output increases with an increase in the working fluid mass flow rate. The increase is greater for the higher compression ratio.

Assumptions

Compression and expansion processes are reversible and adiabatic – isentropic. The working fluid has the same composition throughout the cycle. Ideal gas state equation is valid -- $p v = R T$. Air behaves as a perfect gas -- specific heat has a constant value.

Governing Equations

$$T_2/T_1 = (p_2/p_1)^{(\kappa-1)/\kappa}$$

$$p_2/p_1 = (T_2/T_1)^{\kappa/(\kappa-1)}$$

$$T_3/T_4 = (p_3/p_4)^{(\kappa-1)/\kappa}$$

$$p_3/p_4 = (T_3/T_4)^{\kappa/(\kappa-1)}$$

$$\kappa = c_p/c_v$$

$$pv = RT$$

$$w = q_h - q_l$$

$$w = c_p(T_3 - T_2) - c_p(T_4 - T_1)$$

$$W = (c_p(T_3 - T_2) - c_p(T_4 - T_1))m$$

$$\eta = 1 - 1/r_p^{(\kappa-1)/\kappa}$$

$$r_p = p_2/p_1$$

Input Data

$$T_1 = 298 \text{ [K]}$$

$$p_1 = 1 \text{ [atm]}$$

$$T_3 = 900, 1,200 \text{ and } 1,500 \text{ [K]}$$

$$p_3 = 5 \text{ and } 15 \text{ [atm]}$$

$$c_p = 1.004 \text{ [kJ/kg}\cdot\text{K]}$$

$$\kappa = c_p/c_v - \text{for air } \kappa = 1.4 \text{ []}$$

$$m = 50, 100 \text{ and } 150 \text{ [kg/s]}$$

Results

Brayton Cycle Efficiency vs Compression Ratio

Compression Ratio [/]	Brayton Cycle Efficiency [%]
5	36.92
10	48.22
15	53.87
20	57.53
25	60.16


Specific Power Output vs Compression Ratio for a few Gas Turbine Inlet Values

Specific Power Output [kW/kg/s]	Gas Turbine Inlet Temperature [K]		
	900	1,200	1,500
Compression Ratio [/]			
5	159	270	381
15	137	300	462


Power Output vs Compression Ratio for a few Mass Flow Rates

Power Output [MW]	Mass Flow Rate [kg/s]		
	50	100	150
Compression Ratio [/]			
5	19.1	38.1	57.2
15	23.1	46.2	69.3

Figures

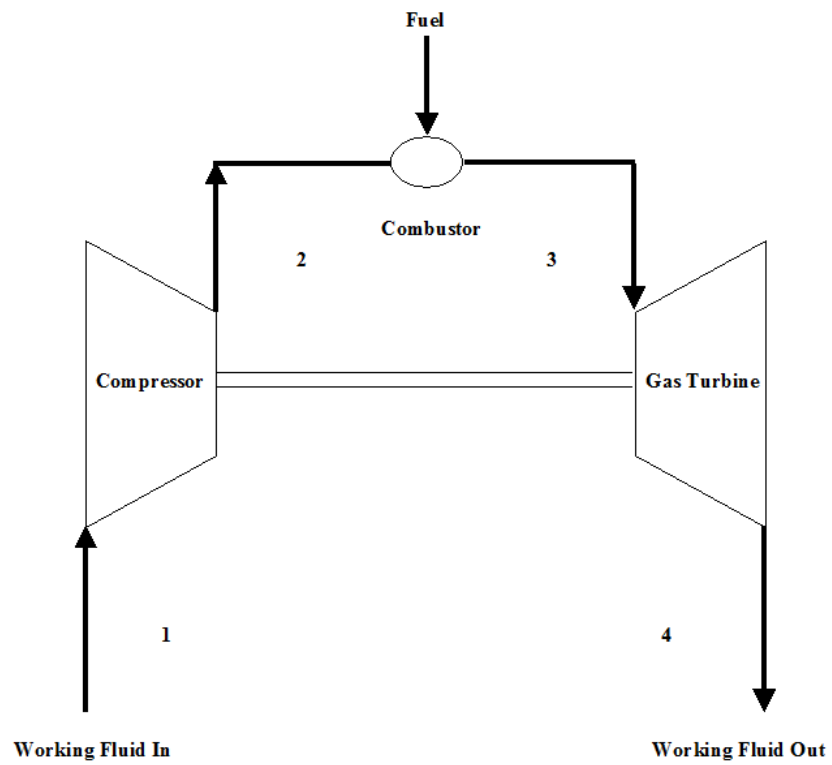


Brayton Cycle (Gas Turbine) Schematic Layout

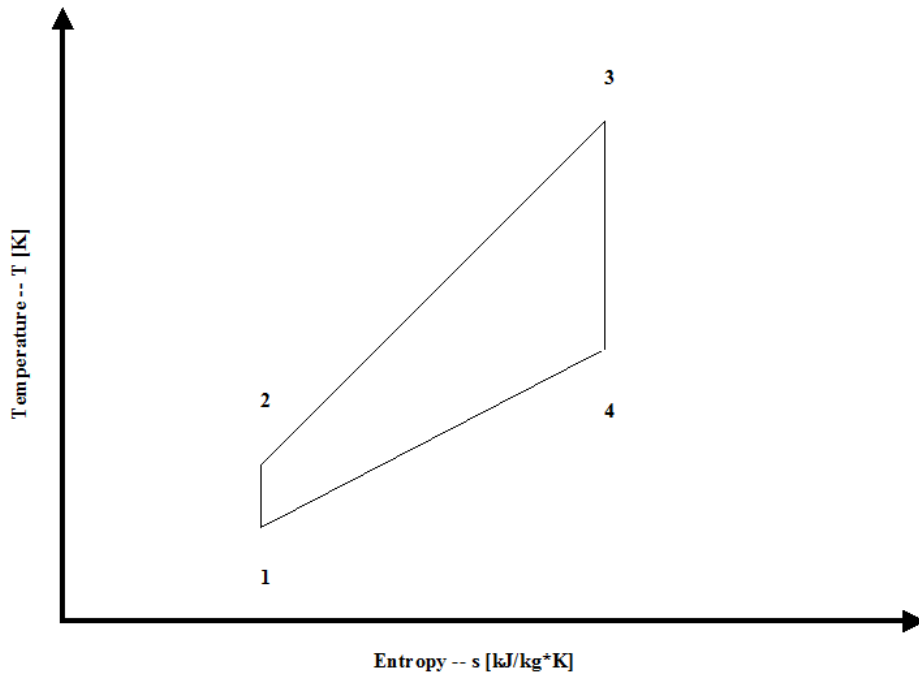


Brayton Cycle (Gas Turbine) T - s Diagram

Brayton Cycle (Gas Turbine) Efficiency

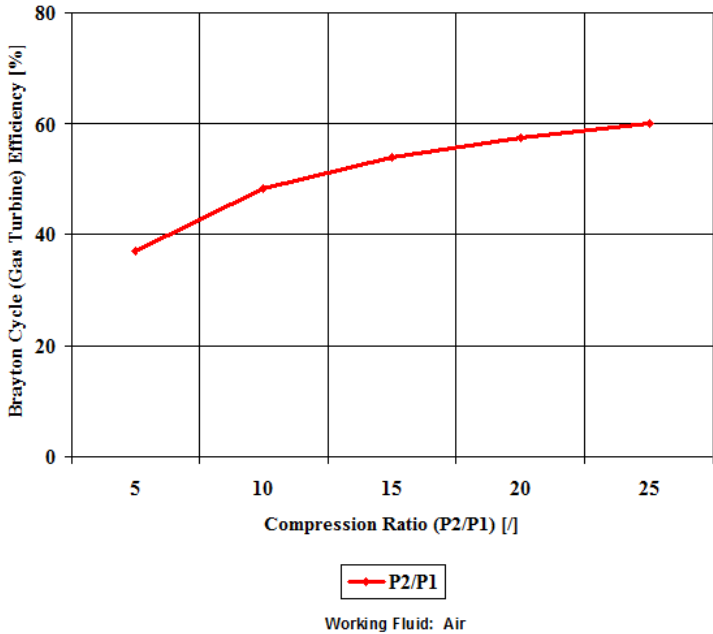

Brayton Cycle (Gas Turbine) Specific Power Output

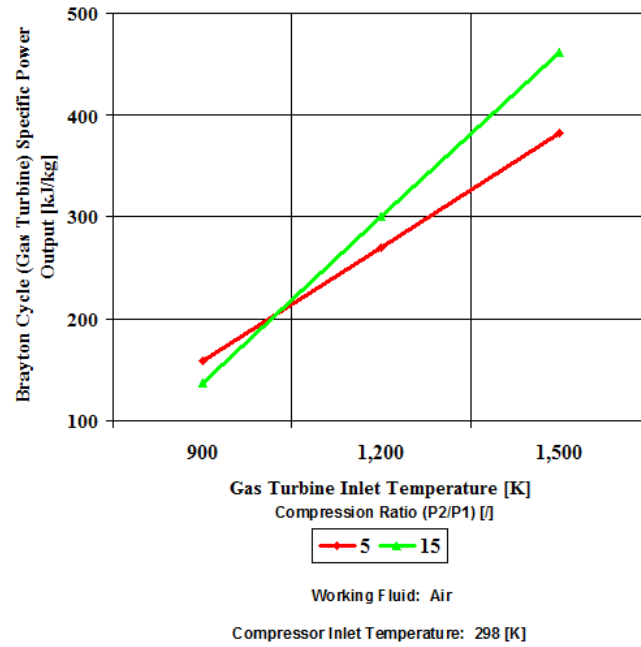

Brayton Cycle (Gas Turbine) Power Output



Working Fluid: Air

Compressor Inlet Temperature: 298 [K] -- Gas Turbine Inlet Temperature: 1,500 [K]

Conclusions

The Brayton Cycle efficiency increases with an increase in the compression ratio. The Brayton Cycle specific power output increases with an increase in the gas turbine inlet temperature. Furthermore, the increase is greater for the higher compression ratio. The Brayton Cycle power output increases with an increase in the working fluid mass flow rate. The increase is greater for the higher compression ratio.

References

JANAF Thermochemical Data - Tables, 1970

Brayton Cycle – Propulsion Application

Introduction

This section provides a Brayton Cycle analysis when the working fluid is air.


Analysis

In the presented Brayton Cycle analysis, only air is considered as the working fluid behaving as a perfect gas -- specific heat has a constant value. Ideal gas state equation is valid -- $pv = RT$.

A gas turbine is a heat engine that uses a high temperature, high pressure gas as the working fluid. Combustion of a fuel in air is usually used to produce the needed temperatures and pressures in the gas turbine, which is why gas turbines are often referred to as combustion turbines. Expansion of the high temperature, high pressure working fluid takes place in the gas turbine. The gas turbine shaft rotation drives an electric generator and a compressor for the working fluid, air, used in the gas turbine combustor. Many gas turbines also use a heat exchanger called a recuperator to impart turbine exhaust heat into the combustor's air/fuel mixture. Gas turbines produce high quality heat that can be used to generate steam for combined heat and power and combined-cycle applications, significantly enhancing efficiency.

The initial state of air is assumed to be at point 1 at the atmospheric conditions, 298 [K] temperature and 1 [atm] pressure. Air is compressed, isentropically, along line 1-2 by a compressor and it enters a combustor. At a constant pressure, combustion takes place (fuel is added to the combustor and the air temperature raises) and/or heat gets added to air. High temperature air exits the combustor at point 3. Then air enters a gas turbine where an isentropic expansion occurs, producing power. Air exits the gas turbine at point 4. It should be mentioned that air at point 1 enters the compressor and the cycle is repeated.


Figure 1 presents a Brayton Cycle schematic layout.

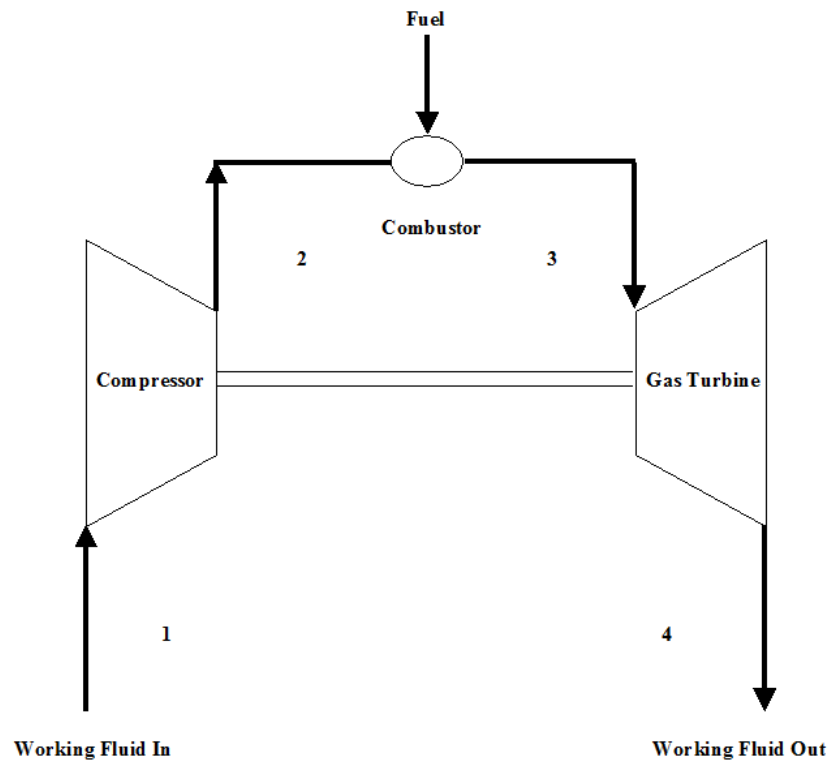

Brayton Cycle (Gas Turbine) Schematic Layout

Figure 1 - Brayton Cycle Schematic Layout

Figure 2 presents a Brayton Cycle temperature vs entropy diagram.

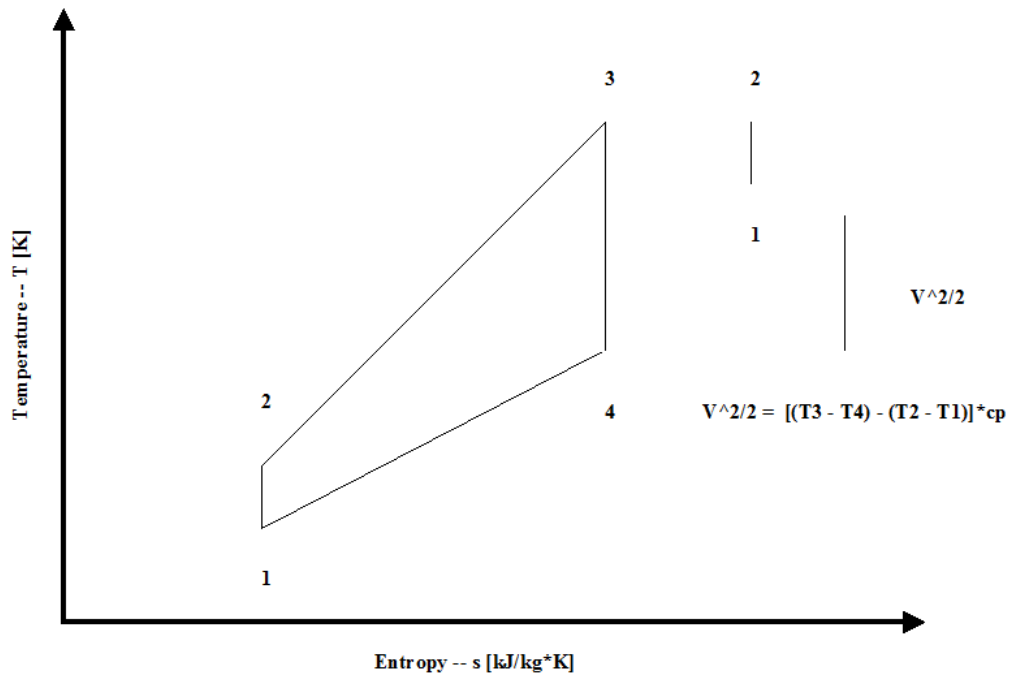

Brayton Cycle (Gas Turbine) T - s Diagram

Figure 2 - Brayton Cycle Temperature vs Entropy Diagram

In order to keep the scope of thrust analysis simple, air exiting turbine expands to the atmospheric conditions – exit pressure is equal to the ambient pressure ($p_1 = p_4$).

It should be pointed out that this material deals with the open Brayton Cycle. The way how the T - s diagram is presented, it describes a closed Brayton Cycle -- this would require a heat exchanger after point 4 where the working fluid would be cooled down to point 1 and the cycle repeats. Therefore, the T - s diagram is presented as a closed Brayton Cycle to allow easier understanding and derivation of the Brayton Cycle thermal efficiency -- heat addition and heat rejection.

The gas turbine and compressor are connected by shaft so the considerable amount of work done on the gas turbine is used to power the compressor.

Propulsion is provided by the difference of gas turbine expansion minus the compressor power requirements.

It can be noticed from the T - s diagram that the work done on the gas turbine is greater than the work necessary to power the compressor -- constant pressure lines in the T - s diagram diverge by going to the right side (entropy wise).

Figure 3 presents the Brayton Cycle efficiency as a function of the compression ratio. Figure 3 presents the Brayton Cycle efficiency as a function of the compression ratio. It should be noted that the inlet conditions are standard ambient conditions: temperature of 298 [K] and absolute pressure of 1 [atm].

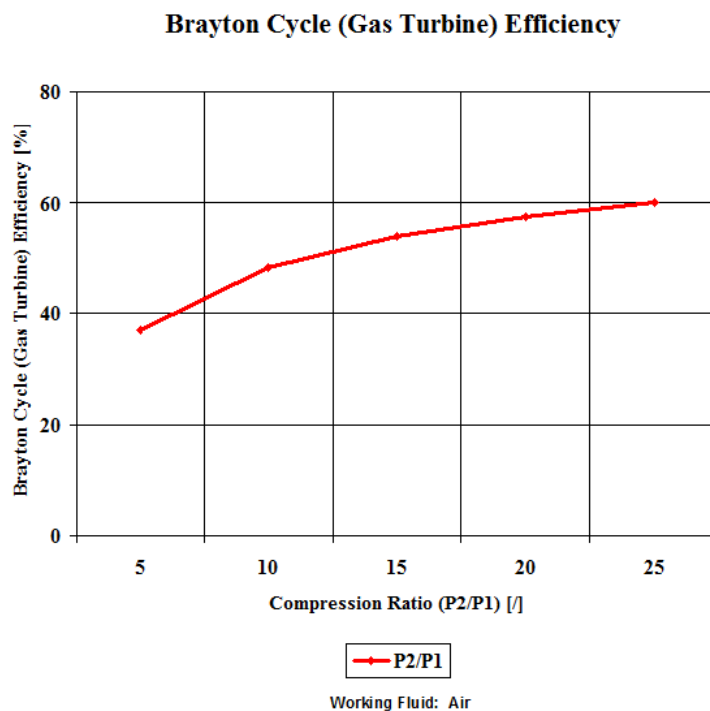


Figure 3 - Brayton Cycle Efficiency

Here, two general performance trends are considered. First, impact of the gas turbine inlet temperature and compression ratio on the Brayton Cycle specific propulsion output and second, impact of the working fluid mass flow rate on the Brayton Cycle propulsion output.

Figure 4 presents the results of the first performance trend, while Figure 5 presents the results of the second trend.

Brayton Cycle (Gas Turbine) Specific Propulsion Output

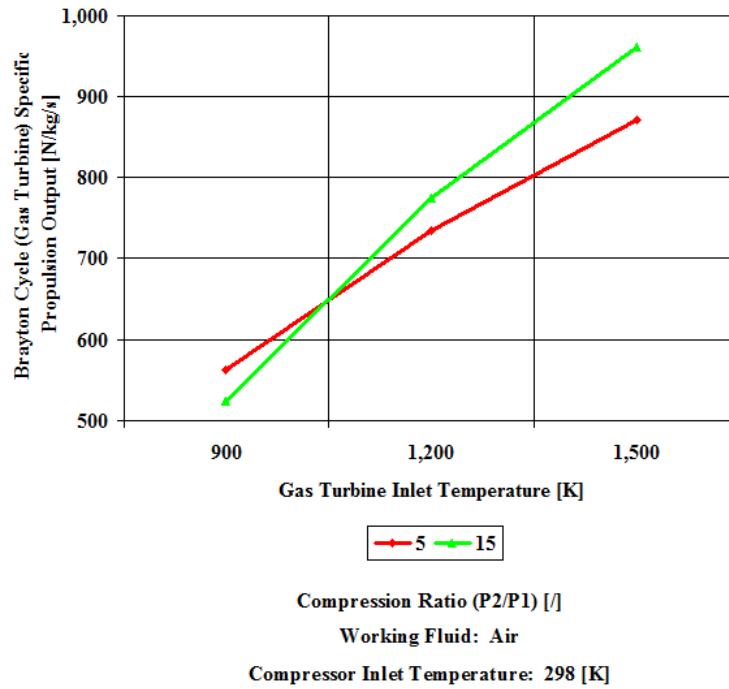


Figure 4 - Brayton Cycle Specific Propulsion Output

Brayton Cycle (Gas Turbine) Propulsion Output

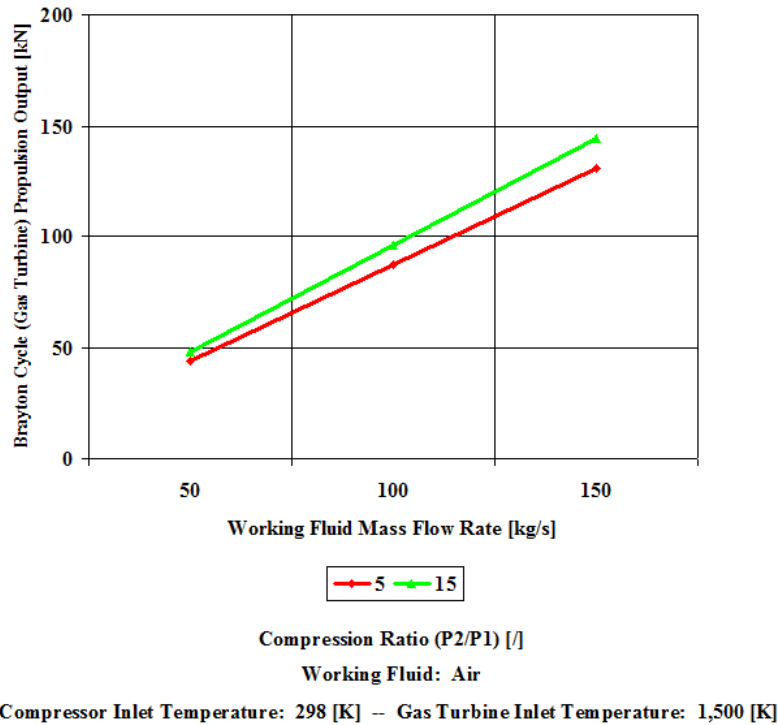


Figure 5 - Brayton Cycle Propulsion Output

One can notice that the Brayton Cycle efficiency increases with an increase in the compression ratio. One can notice that the Brayton Cycle specific propulsion output increases with an increase in the gas turbine inlet temperature. Furthermore, the increase is greater for the higher compression ratio.

One can notice that the Brayton Cycle propulsion output increases with an increase in the working fluid mass flow rate. The increase is greater for the higher compression ratio.

Assumptions

Compression and expansion processes are reversible and adiabatic – isentropic. The working fluid has the same composition throughout the cycle. Ideal gas state equation is valid -- $p v = R T$. Air behaves as a perfect gas -- specific heat has a constant value.

Governing Equations

$$T_2/T_1 = (p_2/p_1)^{(\kappa-1)/\kappa}$$

$$p_2/p_1 = (T_2/T_1)^{\kappa/(\kappa-1)}$$

$$T_3/T_4 = (p_3/p_4)^{(\kappa-1)/\kappa}$$

$$p_3/p_4 = (T_3/T_4)^{\kappa/(\kappa-1)}$$

$$\kappa = c_p/c_v$$

$$pv = RT$$

$$w = q_h - q_l$$

$$w = c_p(T_3 - T_2) - c_p(T_4 - T_1)$$

$$W = (c_p(T_3 - T_2) - c_p(T_4 - T_1))m$$

$$\eta = 1 - 1/r_p^{(\kappa-1)/\kappa}$$

$$r_p = p_2/p_1$$

$$v^2/2 = c_p((T_3 - T_2) - (T_4 - T_1))$$

$$v = (2c_p((T_3 - T_2) - (T_4 - T_1)))^{1/2}$$

$$\text{Thrust} = vm$$

Input Data

$$T_1 = 298 \text{ [K]}$$

$$p_1 = 1 \text{ [atm]}$$

$$T_3 = 900, 1,200 \text{ and } 1,500 \text{ [K]}$$

$$p_3 = 5 \text{ and } 15 \text{ [atm]}$$

$$c_p = 1.004 \text{ [kJ/kg}\cdot\text{K]}$$

$$\kappa = c_p/c_v - \text{for air } \kappa = 1.4 \text{ [/]}$$

$m = 50, 100 \text{ and } 150 \text{ [kg/s]}$

Results

Brayton Cycle Efficiency vs Compression Ratio

Compression Ratio [/]	Brayton Cycle Efficiency [%]
5	36.92
10	48.22
15	53.87
20	57.53
25	60.16


**Specific Propulsion Output vs Compression Ratio
for a few Gas Turbine Inlet Values**

Specific Propulsion Output [N/kg/s]	Gas Turbine Inlet Temperature [K]		
	900	1,200	1,500
Compression Ratio [/]	900	1,200	1,500
5	563	734	872
15	524	774	961


**Propulsion Output vs Compression Ratio
for a few Mass Flow Rates**

Propulsion Output [kN]	Mass Flow Rate [kg/s]		
	50	100	150
Compression Ratio [/]	50	100	150
5	43.61	87.23	130.85
15	48.06	96.11	144.17

Figures

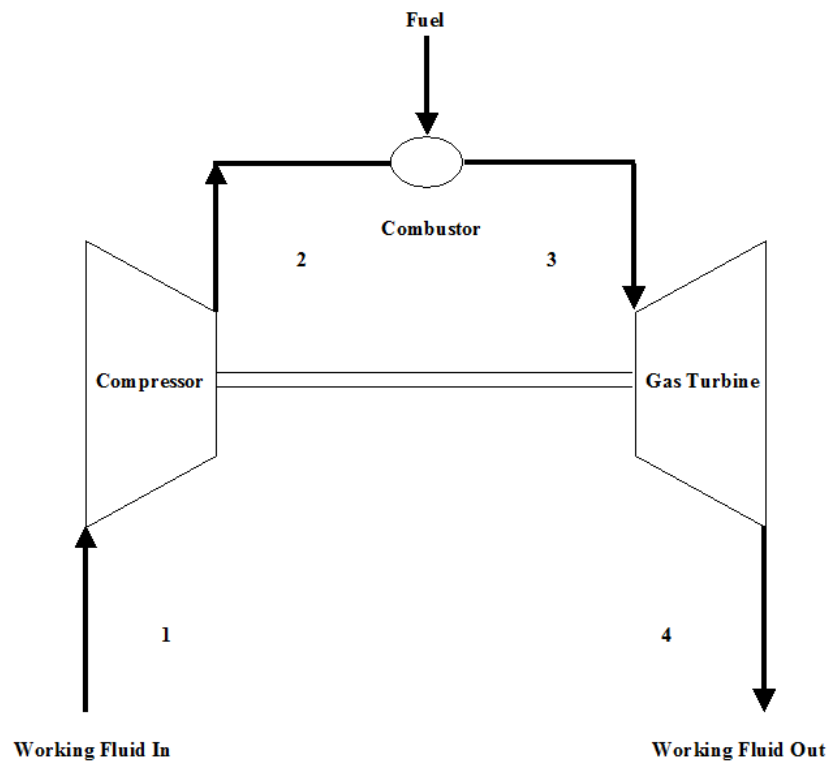


Brayton Cycle (Gas Turbine) Schematic Layout

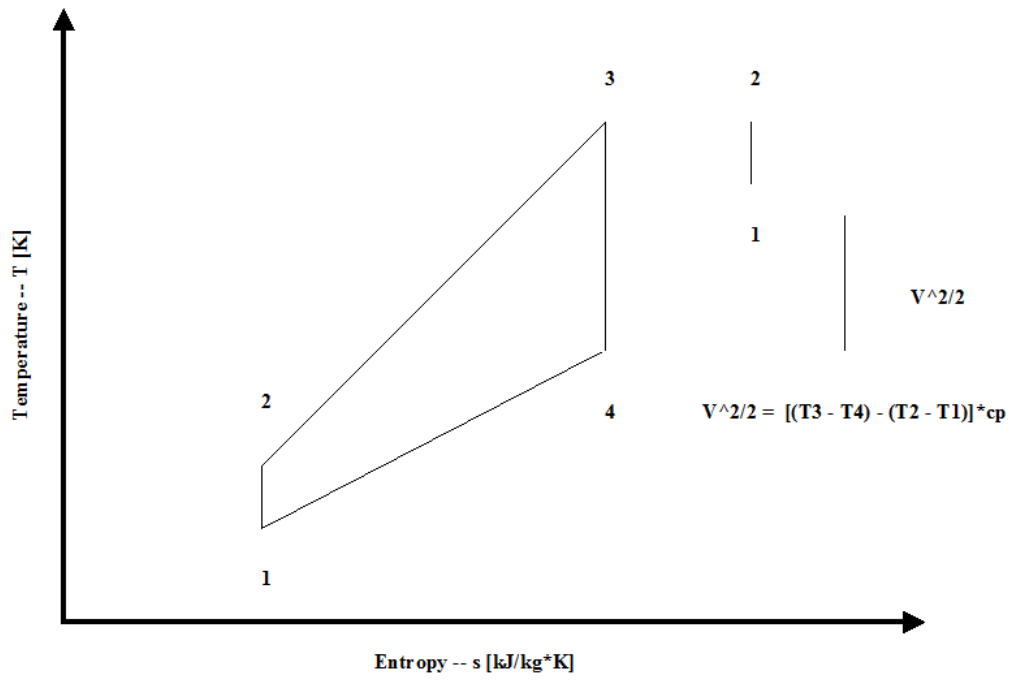


Brayton Cycle (Gas Turbine) T - s Diagram

Brayton Cycle (Gas Turbine) Efficiency

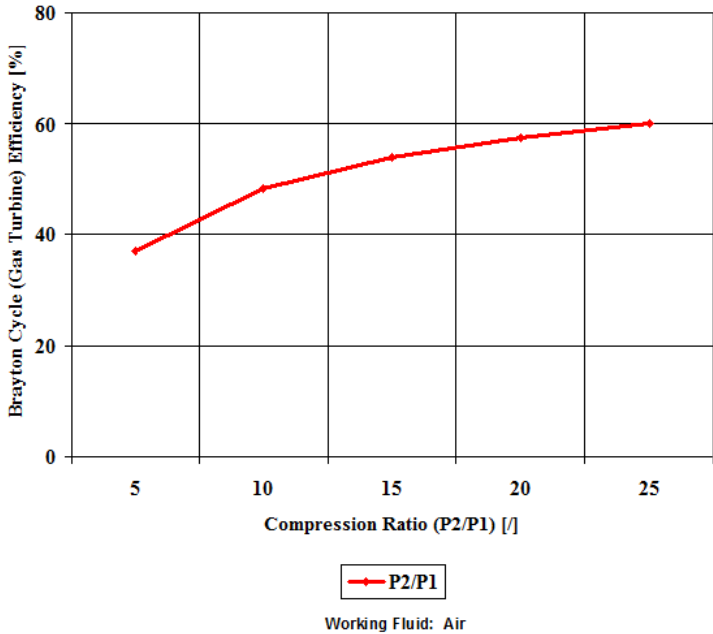

Working Fluid: Air

Brayton Cycle (Gas Turbine) Specific Propulsion Output

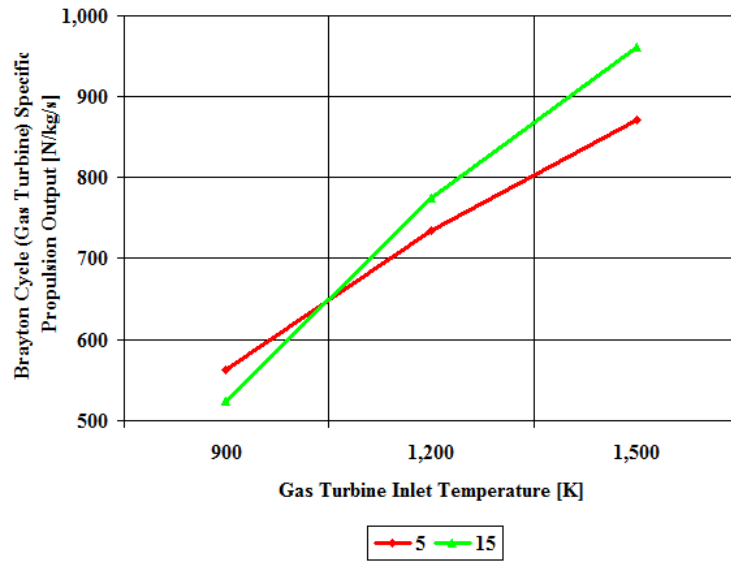


Compression Ratio (P_2/P_1) [1]

Working Fluid: Air

Compressor Inlet Temperature: 298 [K]

Brayton Cycle (Gas Turbine) Propulsion Output

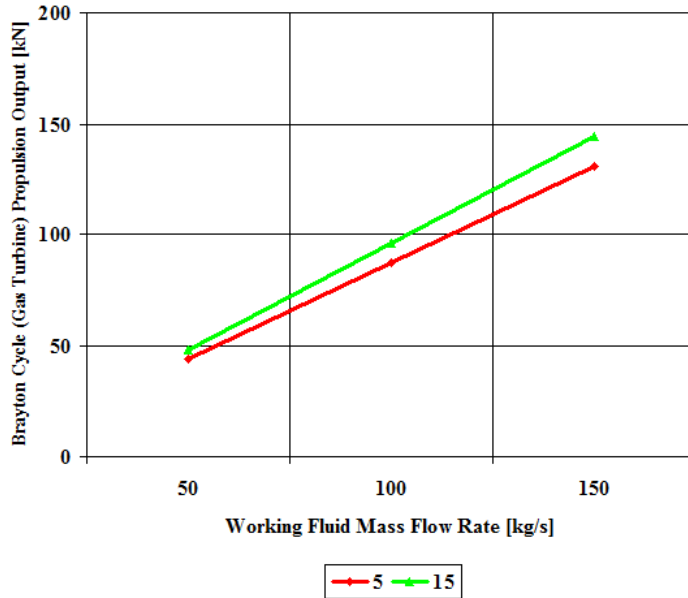

Compression Ratio (P_2/P_1) [1]

Working Fluid: Air

Compressor Inlet Temperature: 298 [K] – Gas Turbine Inlet Temperature: 1,500 [K]

Conclusions

The Brayton Cycle efficiency increases with an increase in the compression ratio. The Brayton Cycle specific propulsion output increases with an increase in the gas turbine inlet temperature. Furthermore, the increase is greater for the higher compression ratio. The Brayton Cycle propulsion output increases with an increase in the working fluid mass flow rate. The increase is greater for the higher compression ratio.

References

JANAF Thermochemical Data - Tables, 1970

Otto Cycle

Introduction

This section provides an Otto Cycle analysis when the working fluid is air.

Analysis

In the presented Otto Cycle analysis, only air is considered as the working fluid behaving as a perfect gas -- specific heat has a constant value. Ideal gas state equation is valid -- $pV = RT$.

Air enters a cylinder at point 1 when compression starts and it ends at point 2. Isentropic compression is considered with no entropy change. Heat addition starts at point 2 and it ends at point 3. At a constant volume, combustion takes place (fuel is added to the cylinder and the air temperature raises) and/or heat gets added to air. Expansion starts at point 3 and it ends at point 4. Isentropic expansion is considered with no entropy change. Air heat rejection starts at point 4 and it ends at point 1. At a constant volume, air gets cooled and the working fluid temperature goes down. It should be mentioned that air at point 1 enters the compression process again and the cycle is repeated.

Figure 1 presents an Otto Cycle pressure vs volume diagram.

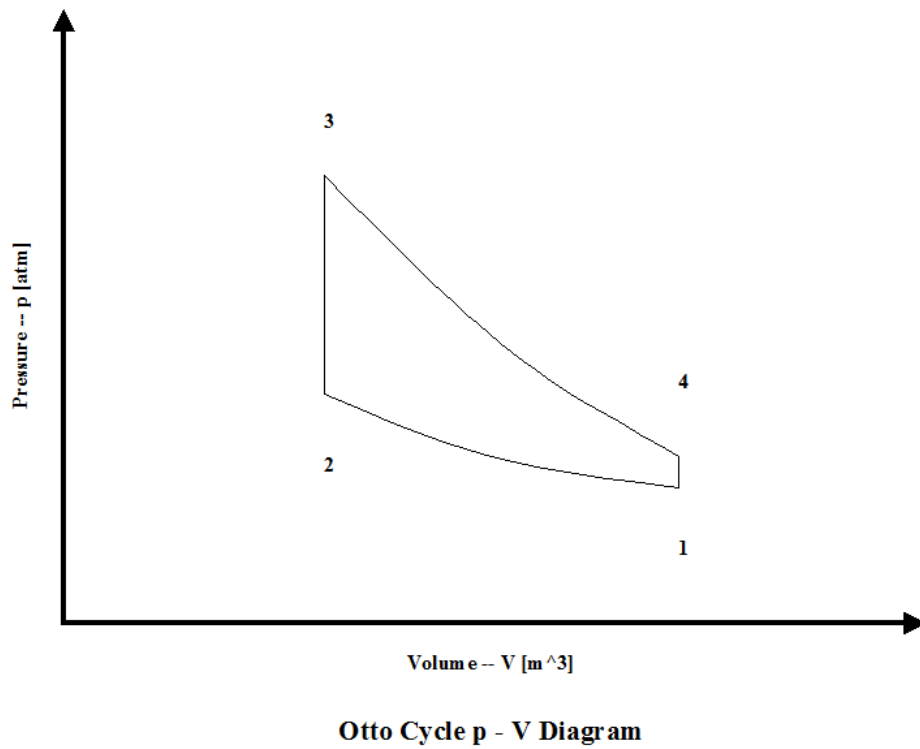


Figure 1 - Otto Cycle Pressure vs Volume Diagram

Figure 2 presents an Otto Cycle temperature vs entropy diagram.

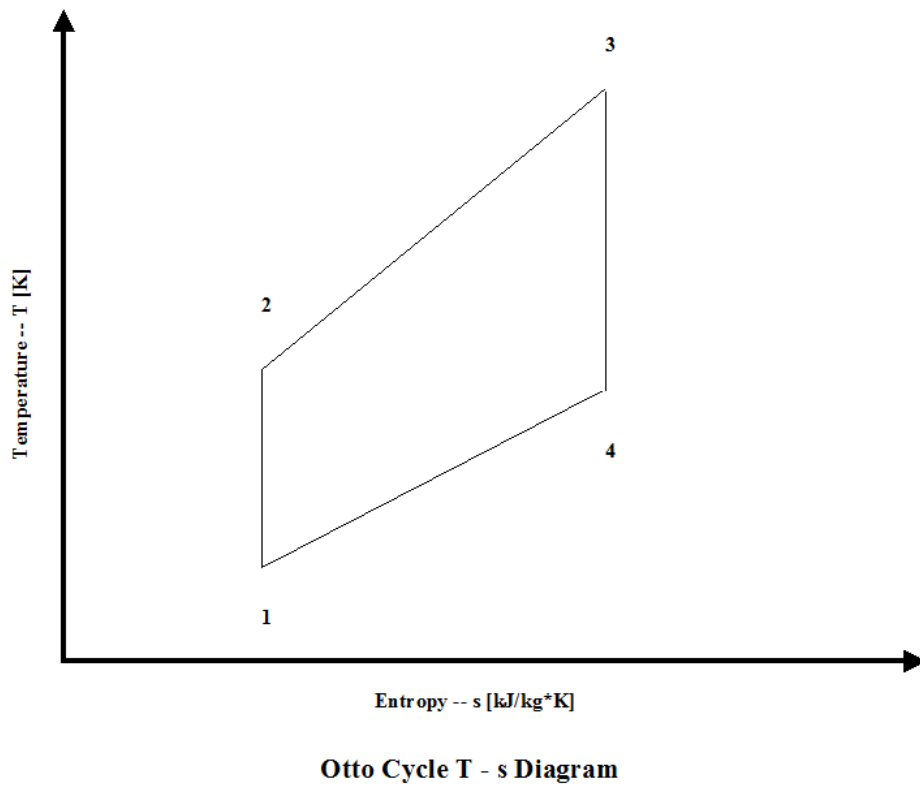


Figure 2 - Otto Cycle Temperature vs Entropy Diagram

Figure 3 presents the Otto Cycle efficiency as a function of the compression ratio. . It should be noted that the inlet conditions are standard ambient conditions: temperature of 298 [K] and absolute pressure of 1 [atm].

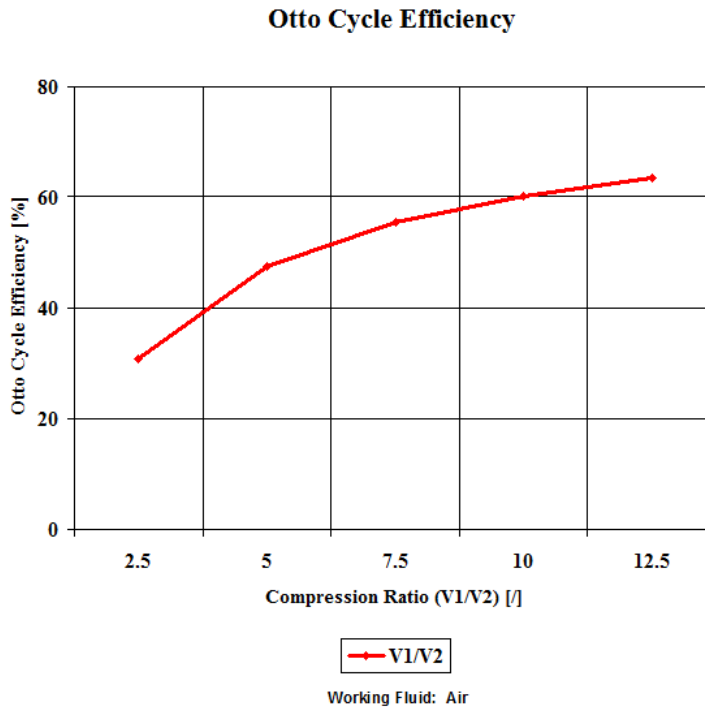


Figure 3 - Otto Cycle Efficiency

Figure 4 presents the Otto Cycle power output as a function of combustion temperature and compression ratio. It should be noted that the number of revolutions is 60 [1/s] for a given geometry of a four cylinder and four stroke Otto engine.

Otto Cycle Power Output

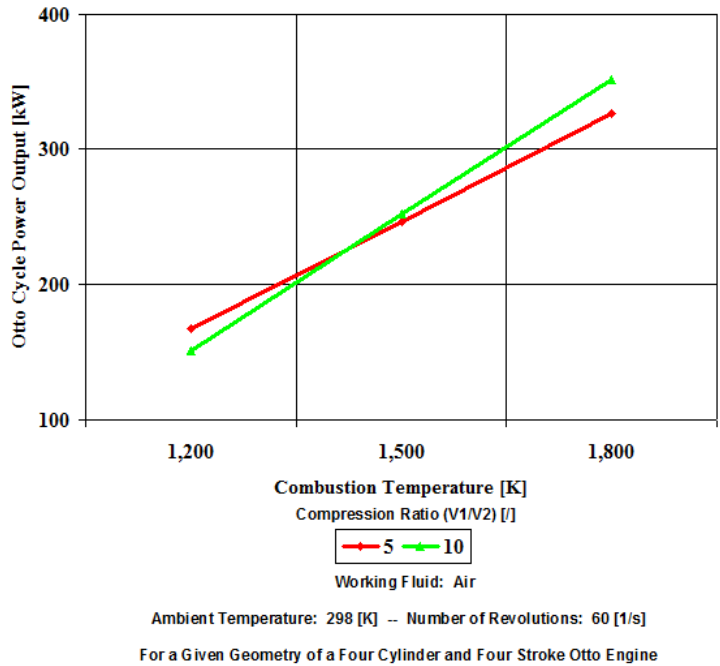


Figure 4 - Otto Cycle Power Output

One can notice that the Otto Cycle efficiency increases with an increase in the compression ratio. One can notice that the Otto Cycle power output increases with an increase in the combustion temperature and that the Otto Cycle power output is greater for higher compression ratio values.

Assumptions

Working fluid is air. There is no friction. Compression and expansion are isentropic -- there is no entropy change. During heat addition and heat rejection, the air temperature does change. Ideal gas state equation is valid -- $pV = RT$. Air behaves as a perfect gas -- specific heat has a constant value.

Governing Equations

$$T_2/T_1 = (V_1/V_2)^{(\gamma-1)}$$

$$V_1/V_2 = (T_2/T_1)^{1/(\gamma-1)}$$

$$T_3/T_4 = (V_4/V_3)^{(\kappa-1)}$$

$$V_4/V_3 = (T_3/T_4)^{1/(\kappa-1)}$$

$$\kappa = c_p/c_v$$

$$pv = RT$$

$$w = q_h - q_l$$

$$w = c_v(T_3 - T_2) - c_v(T_4 - T_1)$$

$$W = (c_v(T_3 - T_2) - c_v(T_4 - T_1))m$$

$$\eta = 1 - 1/\varepsilon^{(\kappa-1)}$$

$$\varepsilon = V_1/V_2$$

Input Data

$$T_1 = 298 \text{ [K]}$$

$$p_1 = 1 \text{ [atm]}$$

$$T_3 = 1,200, 1,500 \text{ and } 1,800 \text{ [K]}$$

$$\varepsilon = 5 \text{ and } 10 \text{ []}$$

$$c_p = 1.004 \text{ [kJ/kg}\cdot\text{K]}$$

$$\kappa = c_p/c_v - \text{for air } \kappa = 1.4 \text{ []}$$

Results


Otto Cycle Efficiency vs Compression Ratio

Compression Ratio [/]	Otto Cycle Efficiency [%]
2.5	30.69
5	47.47
7.5	55.33
10	60.19
12.5	63.59


Otto Cycle Power Output

Power Output [kW]	Combustion Temperature [K]		
Compression Ratio [/]	1,200	1,500	1,800
5	167	246	326
10	151	252	352

Figures

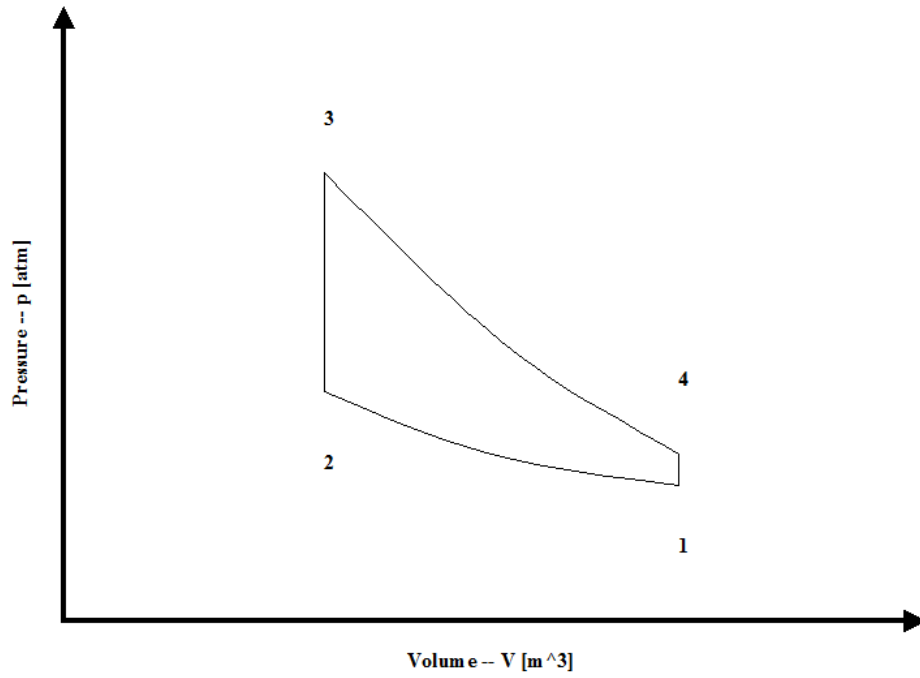


Otto Cycle p - V Diagram

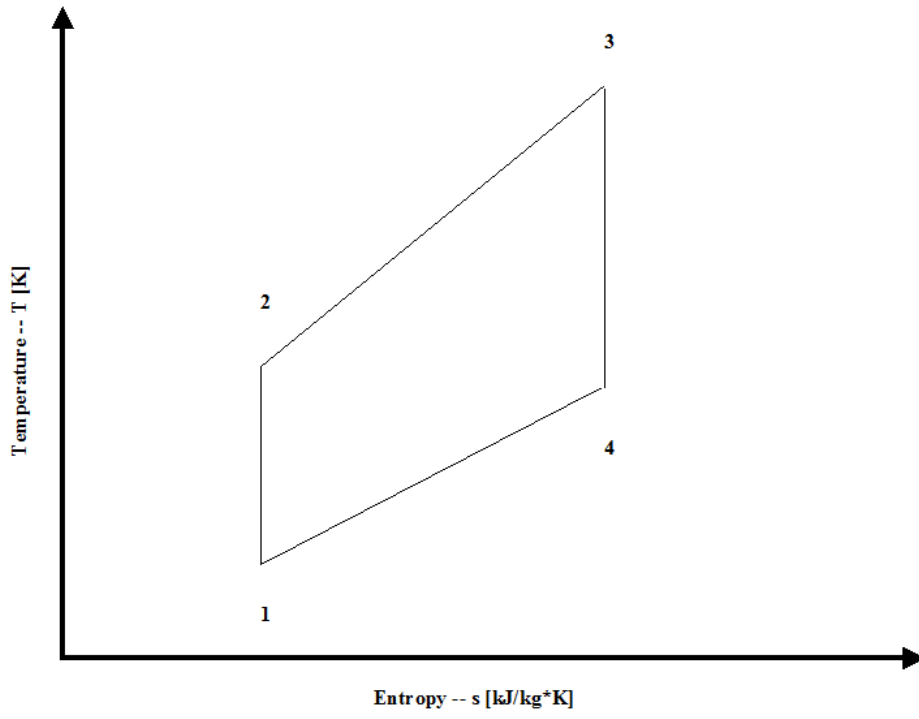

Otto Cycle T - s Diagram


Otto Cycle Efficiency

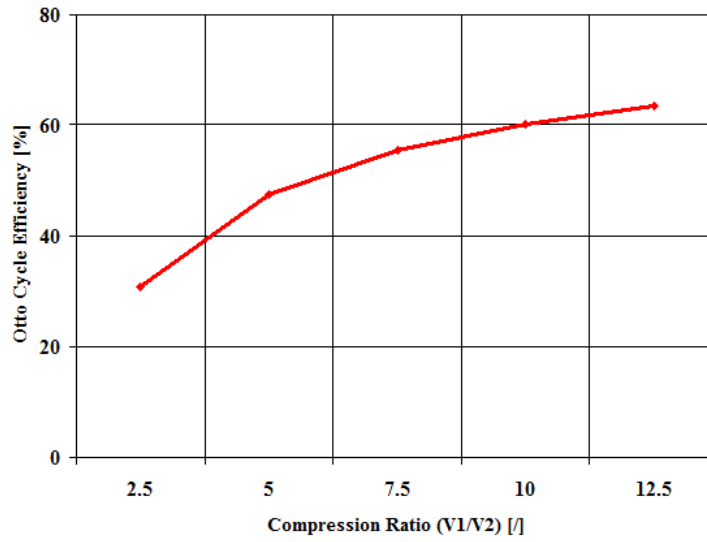

—◆— V1/V2

Working Fluid: Air

Otto Cycle Power Output

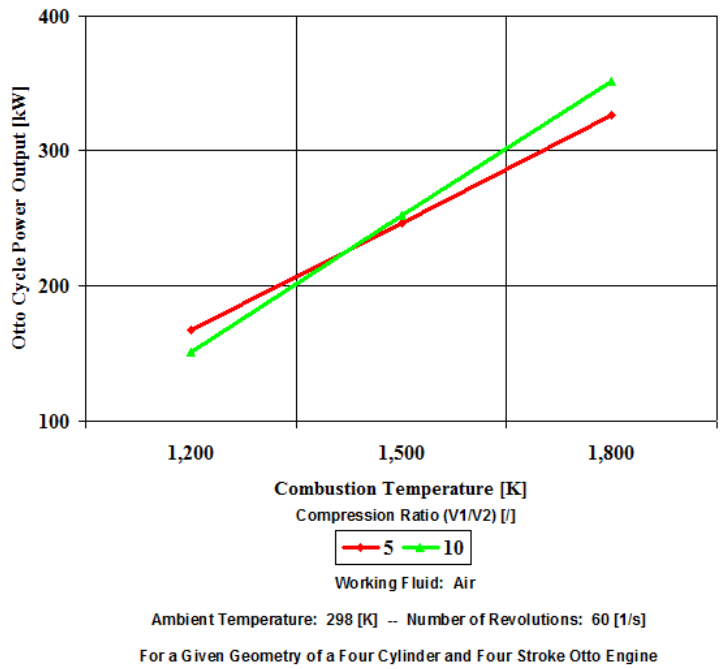

Conclusions

The Otto Cycle efficiency increases with an increase in the compression ratio. Also, the Otto Cycle power output increases with an increase in the combustion temperature and the Otto Cycle power output is greater for higher compression ratio values.

References

JANAF Thermochemical Data - Tables, 1970

Diesel Cycle

Introduction


This section provides a Diesel Cycle analysis when the working fluid is air.

Analysis

In the presented Diesel Cycle analysis, only air is considered as the working fluid behaving as a perfect gas -- specific heat has a constant value. Ideal gas state equation is valid -- $pV = RT$.

Air enters a cylinder at point 1 when compression starts and it ends at point 2. Isentropic compression is considered with no entropy change. Heat addition starts at point 2 and it ends at point 3. At a constant pressure, combustion takes place (fuel is added to the cylinder and the air temperature raises) and/or heat gets added to air. Expansion starts at point 3 and it ends at point 4. Isentropic expansion is considered with no entropy change. Air heat rejection starts at point 4 and it ends at point 1. At a constant volume, air gets cooled and the working fluid temperature goes down. It should be mentioned that air at point 1 enters the compression process again and the cycle is repeated.

Figure 1 presents a Diesel Cycle pressure vs volume diagram.

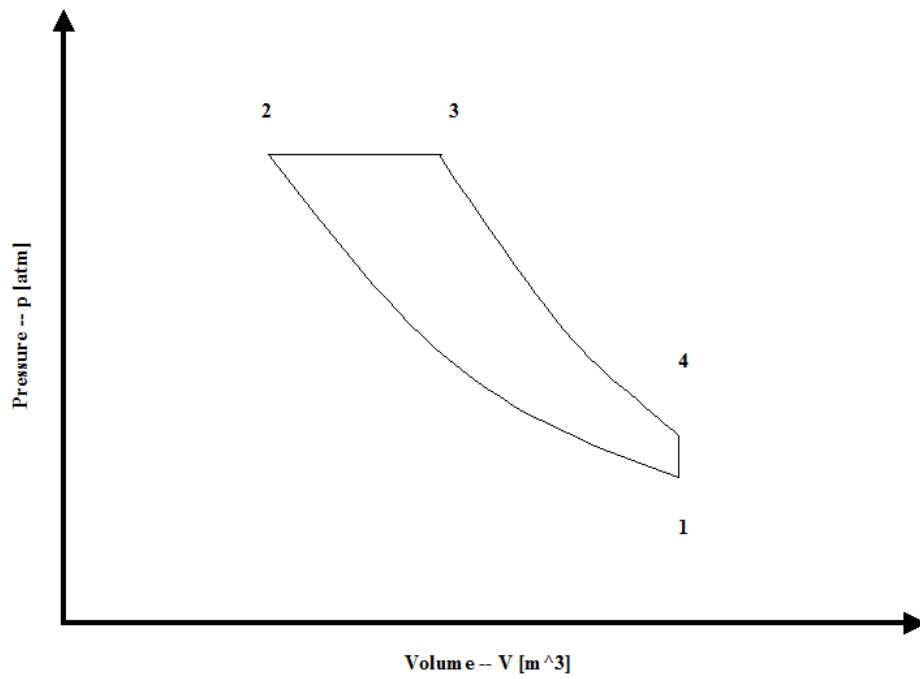

Diesel Cycle p - V Diagram

Figure 1 - Diesel Cycle Pressure vs Volume Diagram

Figure 2 presents a Diesel Cycle temperature vs entropy diagram.

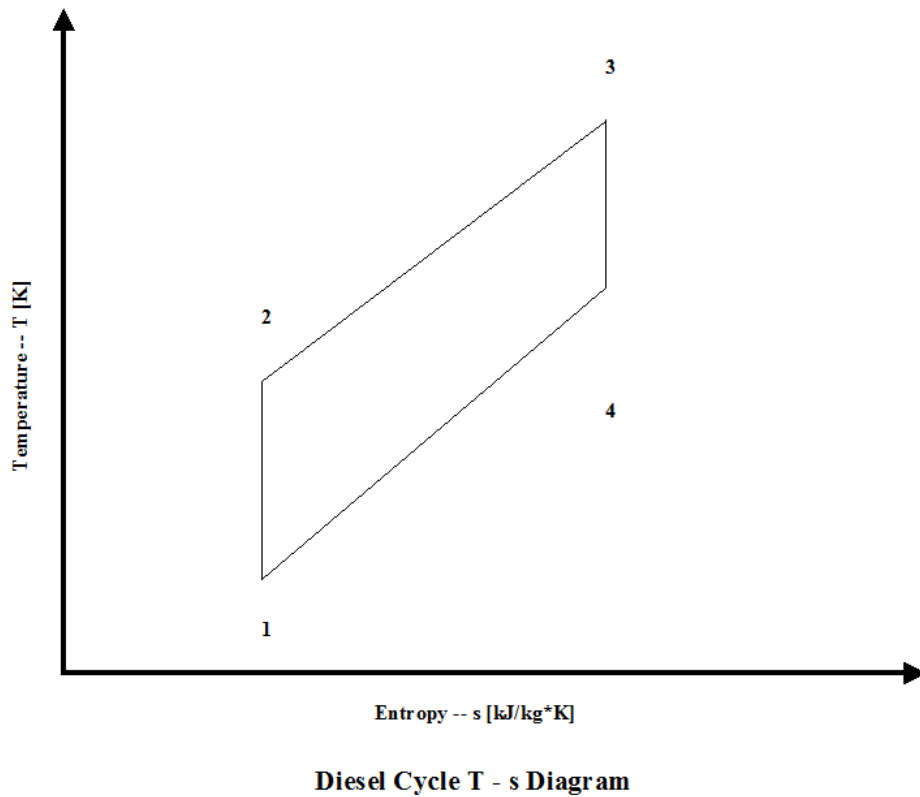


Figure 2 - Diesel Cycle Temperature vs Entropy Diagram

Figure 3 presents the Diesel Cycle efficiency as a function of the compression ratio and cut off ratio values. It should be noted that the inlet conditions are standard ambient conditions: temperature of 298 [K] and absolute pressure of 1 [atm].

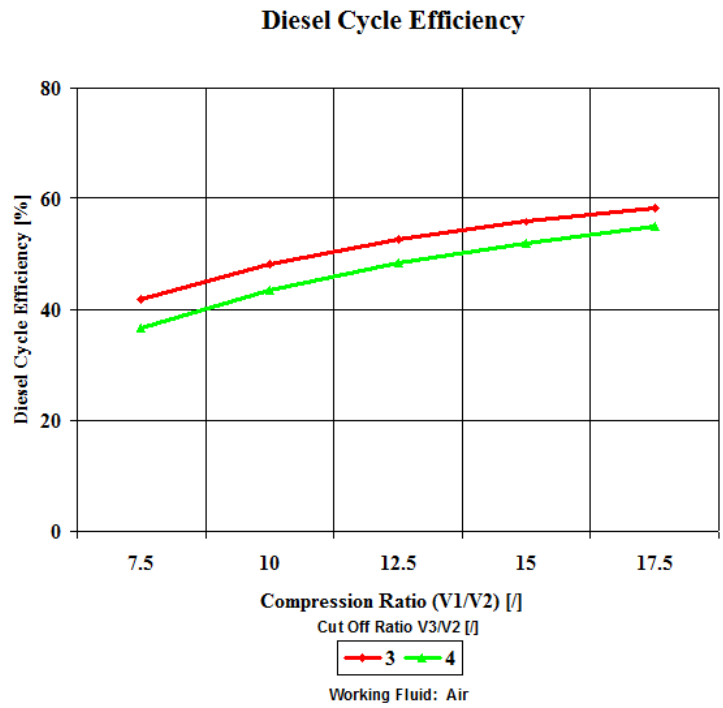


Figure 3 - Diesel Cycle Efficiency

Figure 4 presents the Diesel Cycle efficiency as a function of the compression ratio and combustion temperature values.

Diesel Cycle Efficiency

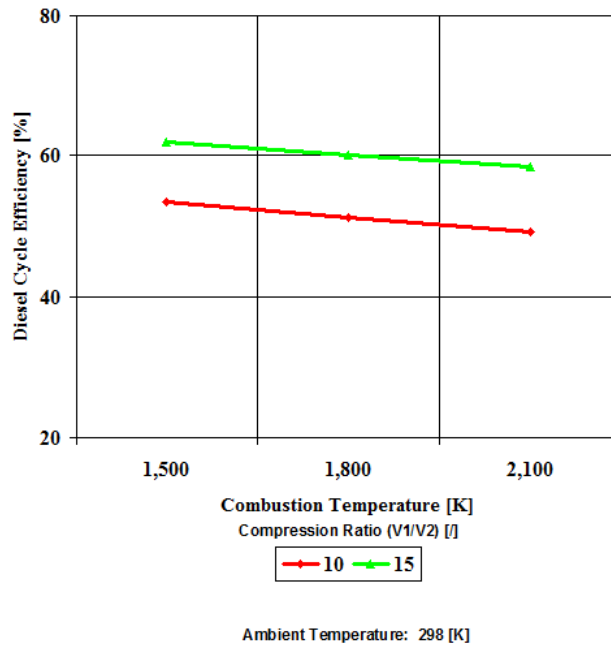


Figure 4 - Diesel Cycle Efficiency

Figure 5 presents the Diesel Cycle cut off ratio as a function of the combustion temperature and compression ratio values.

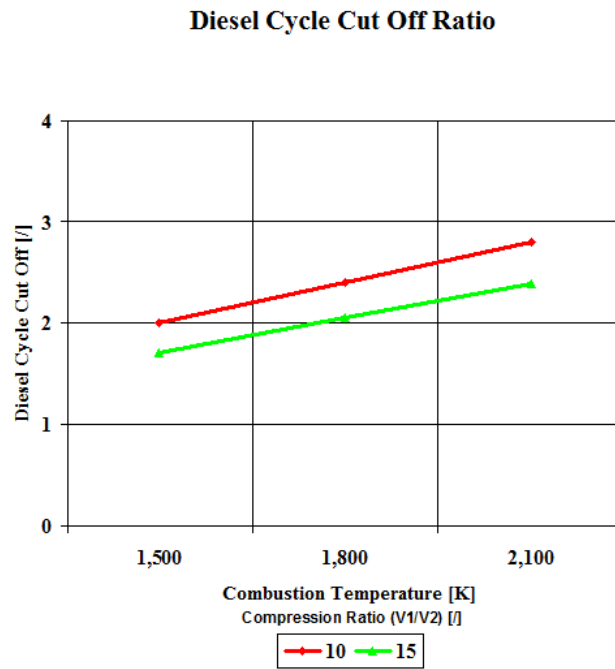


Figure 5 - Diesel Cycle Cut Off Ratio

Figure 6 presents the Diesel Cycle power output as a function the combustion temperature and compression ratio values. It should be noted that the number of revolutions is 60 [1/s] for a given geometry of a four cylinder and four stroke Diesel engine.

Diesel Cycle Power Output

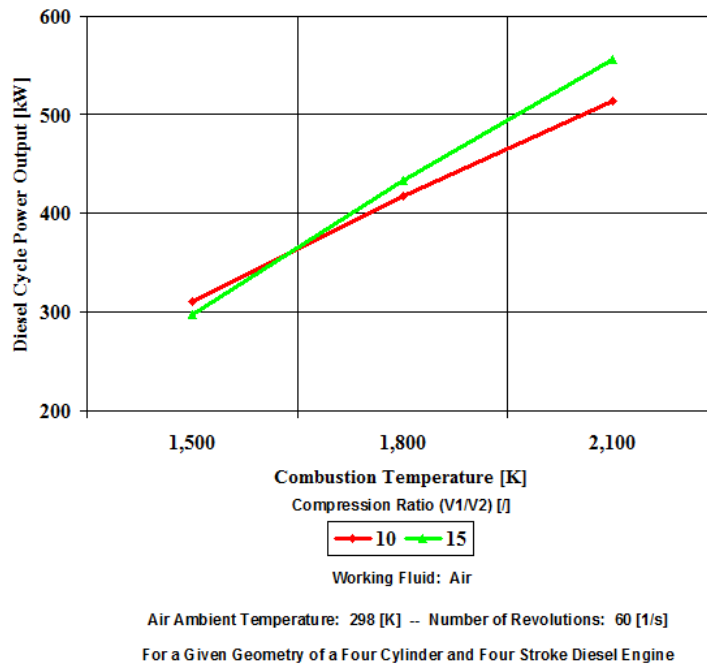


Figure 6 - Diesel Cycle Power Output

One can notice that the Diesel Cycle efficiency increases with an increase in the compression ratio and a decrease of the cut off ratio values. One can notice that the Diesel Cycle power output increases with an increase in the compression ratio and combustion temperature and that the Diesel Cycle power output is greater for lower cut off ratio values for given combustion temperature values.

Assumptions

Working fluid is air. There is no friction. Compression and expansion are isentropic -- there is no entropy change. During heat addition and heat rejection, the air temperature does change. Ideal gas state equation is valid -- $p v = R T$. Air behaves as a perfect gas -- specific heat has a constant value.

Governing Equations

$$T_2/T_1 = (V_1/V_2)^{(\kappa-1)}$$

$$V_1/V_2 = (T_2/T_1)^{1/(\kappa-1)}$$

$$T_3/T_4 = (V_4/V_3)^{(\kappa-1)}$$

$$V_4/V_3 = (T_3/T_4)^{1/(\kappa-1)}$$

$$\kappa = c_p/c_v$$

$$pv = RT$$

$$w = q_h - q_l$$

$$w = c_p(T_3 - T_2) - c_v(T_4 - T_1)$$

$$W = (c_p(T_3 - T_2) - c_v(T_4 - T_1))m$$

$$\eta = 1 - (\varphi^\kappa - 1)/(\kappa\varepsilon^{(\kappa-1)}(\varphi - 1))$$

$$\varepsilon = V_1/V_2$$

$$\varphi = V_3/V_2$$

Input Data

$$T_1 = 298 \text{ [K]}$$

$$p_1 = 1 \text{ [atm]}$$

$$T_3 = 1,500, 1,800 \text{ and } 2,100 \text{ [K]}$$

$$\varepsilon = 7.5, 10, 12.5, 15 \text{ and } 17.5 \text{ []}$$

$$\varphi = 3 \text{ and } 4 \text{ []}$$

$$c_p = 1.004 \text{ [kJ/kg}\cdot\text{K]}$$

$$\kappa = c_p/c_v - \text{for air } \kappa = 1.4 \text{ []}$$

Results

Diesel Cycle Efficiency

Diesel Cycle Efficiency [%]	Compression Ratio [/]				
Cut Off Ratio [/]	7.5	10	12.5	15	17.5
3	41.69	48.03	52.46	55.81	58.45
4	36.57	43.46	48.29	51.93	54.80

Diesel Cycle Efficiency

Diesel Cycle Efficiency [%]	Combustion Temperature [K]		
Compression Ratio [/]	1,500	1,800	2,100
10	53.39	51.12	49.20
15	61.94	60.12	58.49


Diesel Cycle Cut Off Ratio

Cut Off Ratio [/]	Combustion Temperature [K]		
Compression Ratio [/]	1,500	1,800	2,100
10	2.00	2.40	2.80
15	1.70	2.05	2.39


Diesel Cycle Power Output

Power Output [kW]	Combustion Temperature [K]		
Compression Ratio [/]	1,500	1,800	2,100
10	311	417	514
15	297	433	557

Figures

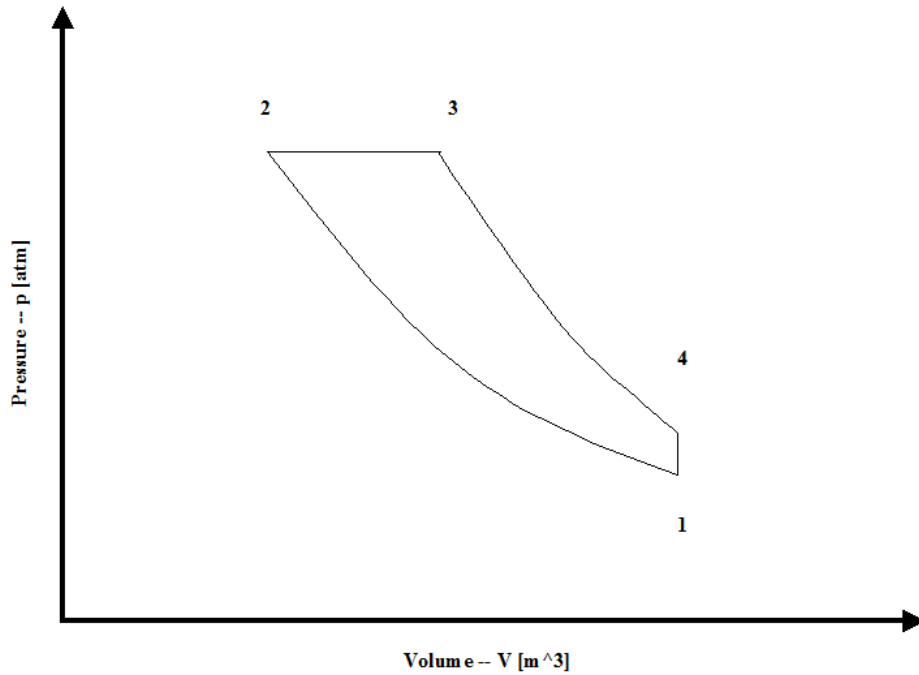


Diesel Cycle p - V Diagram

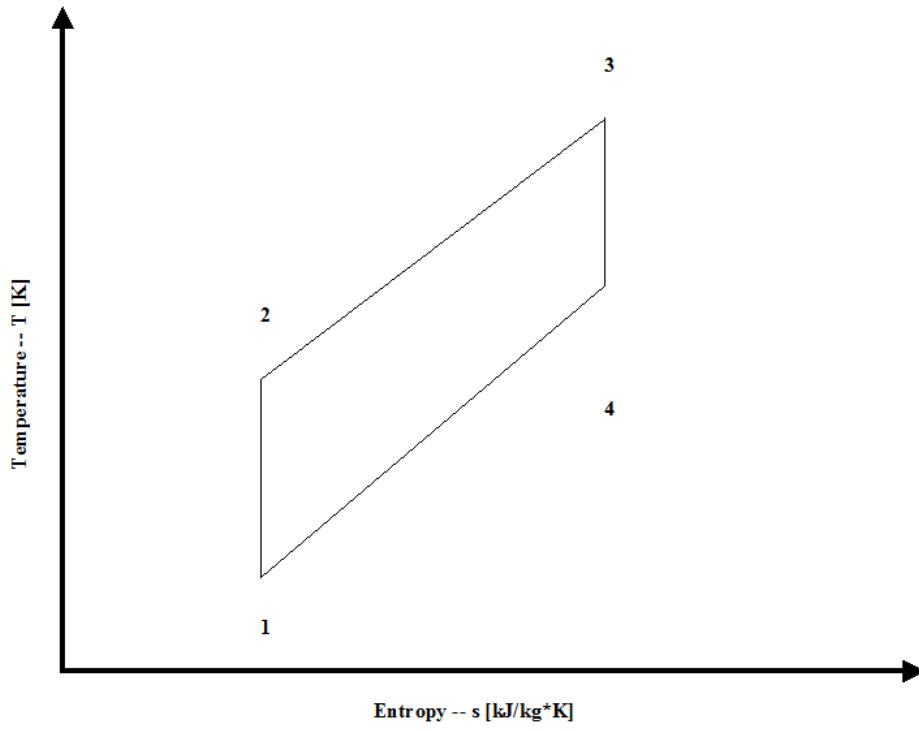


Diesel Cycle $T - s$ Diagram

Diesel Cycle Efficiency

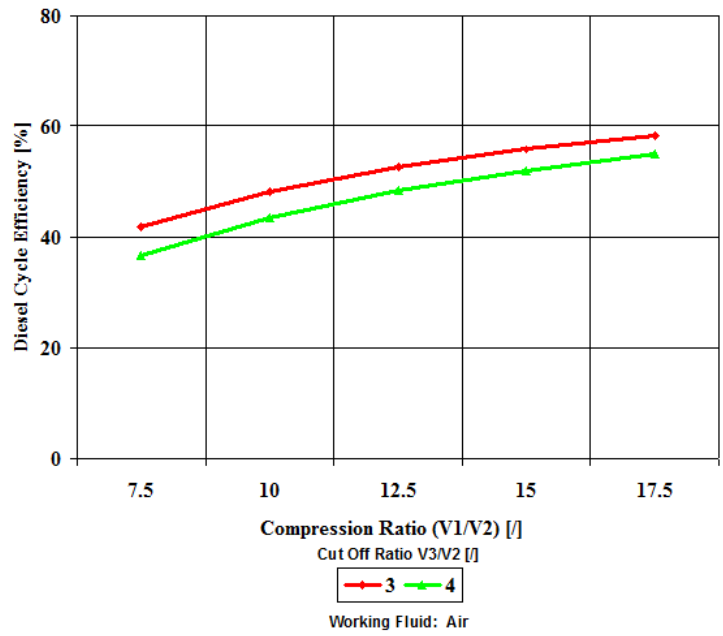


Diesel Cycle Efficiency

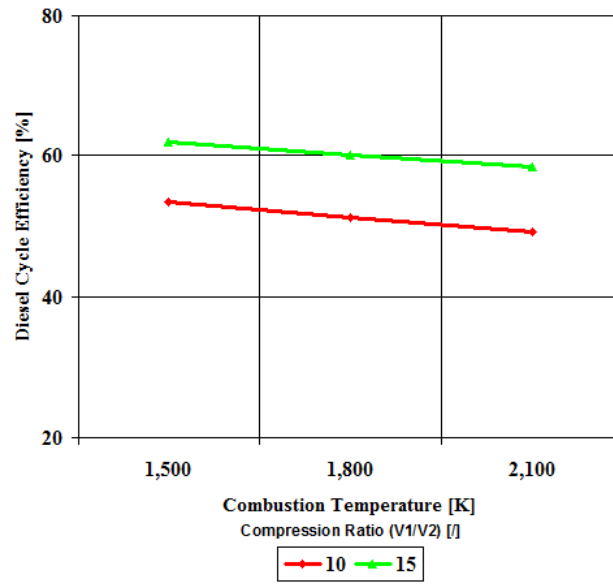


Ambient Temperature: 298 [K]

Diesel Cycle Cut Off Ratio

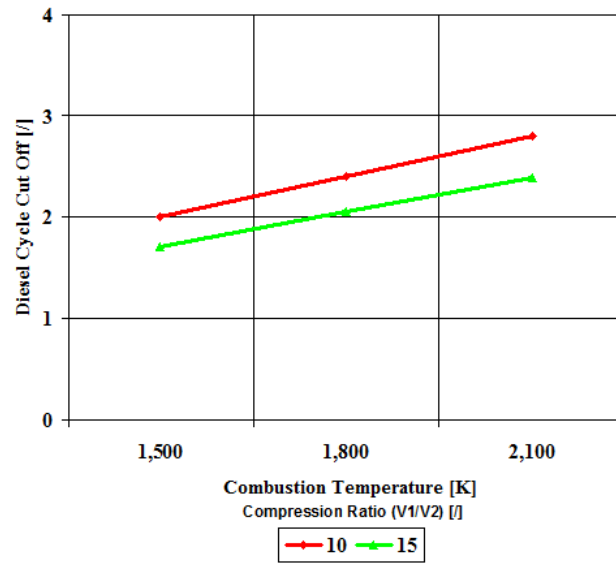

Diesel Cycle Power Output

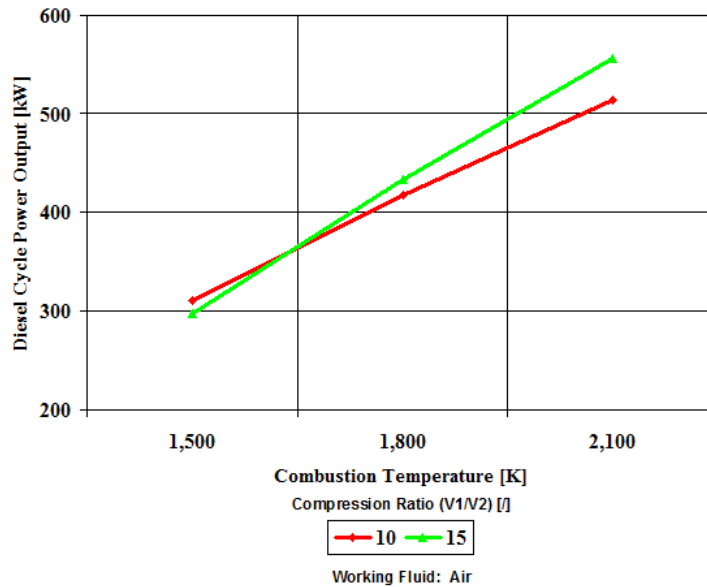

Working Fluid: Air
Air Ambient Temperature: 298 [K] -- Number of Revolutions: 60 [1/s]
For a Given Geometry of a Four Cylinder and Four Stroke Diesel Engine

Conclusions

The Diesel Cycle efficiency increases with an increase in the compression ratio and a decrease in the cut off ratio values. Also, the Diesel Cycle power output increases with an increase in the compression ratio and combustion temperature and the Diesel Cycle power output is greater for lower cut off ratio values for given combustion temperature values.

References

JANAF Thermochemical Data - Tables, 1970